

Features:

- Hardened & Ground Guideways
- Hardened & Ground Worktable
- Mehanite Casting
- Box Ways Y & X Axis
- Swing Arm Pendant Control Panel
- Infinitely Variable Speed Head
- Chip Tray, Flood Coolant System
- Halogen Worklight
- One Shot Lubrication to all Ways (AutoLube unit on GM-7VSL)
- Power Down Feed
- Powered Knee Raise/Lower
- Powered X-Axis Feed (GEARED)
- Powered Y-Axis Feed (GEARED)
- Manual & Toolbox
- Electrical Certification


Vertical Knee Mills

10"x50"

13"x54"

14"x54"

Shown With
Optional Digital
Read-out

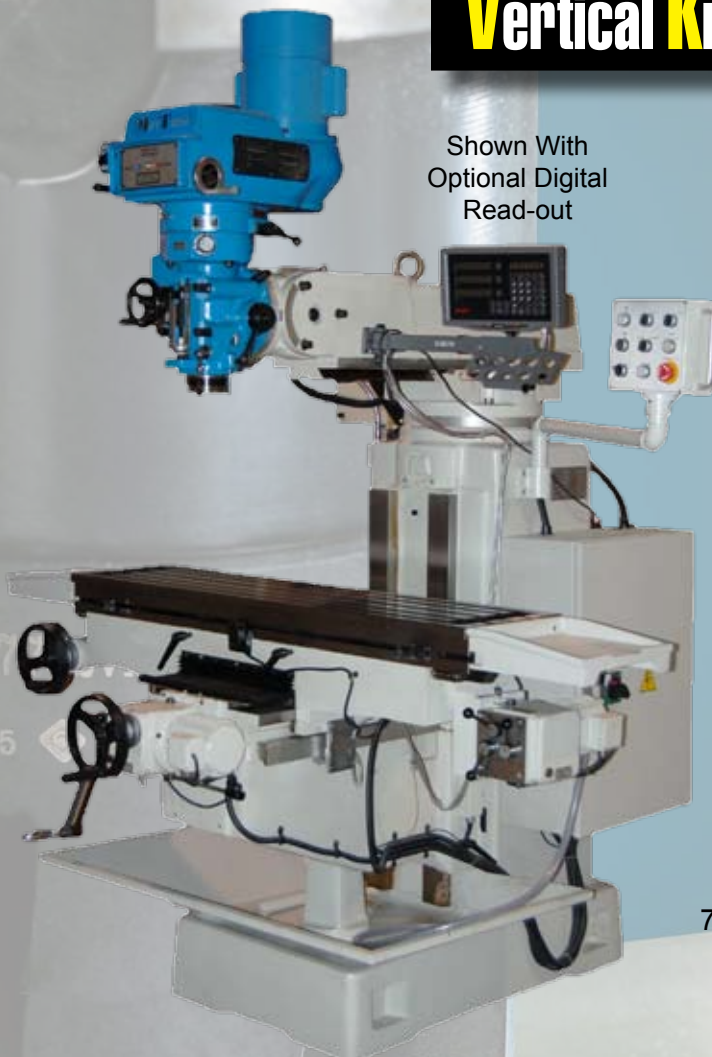

7482-GM-6VSL
Shown

**5Hp. Motors & Geared
Table Feeds!**

Lease From \$282/mth. Lease From \$305/mth. Lease From \$368/mth.

\$11,990

\$12,990

\$15,990



Pendant Control Panel



Rigid Box Way Design

Specifications		7482-GM-5VSL	7482-GM-6VSL	7482-GM-7VSL
Table	Table Size	50"x10"	54"x13"	54"x14"
	Longitudinal Travel	39"		40.5"
	Cross Travel	16"	15.3"	19.5"
	Vertical Knee Travel	17.7"		19.7"
Head	Main Motor	5 Hp.		
	Head Tilts Front/Back	Yes		
	Head Swivels Left/Right	Yes		
	Head Rotates Around Column	Yes		
Spindle	Spindle Speeds	70-3900 Rpm. Infinitely Variable		
	Spindle Taper	ISO #40		
	Quill Travel	5.90"		
	Max. Vertical Distance Spindle to Table	24"	22"	26.77"
	Overall Dimensions	60"x67"x96"	86"x67"x96"	95"x71"x105"
	Voltage	220V 1Ph. 60Hz.		220V 3Ph. 60Hz.
	Weight (Lbs.)	4,620	5,060	5,940